


MOBILE SCENE MANAGEMENT BARRIER

- **CBRN Scene Management**
- **Crowd Control Barrier**
- **Ballistic Shield Option**

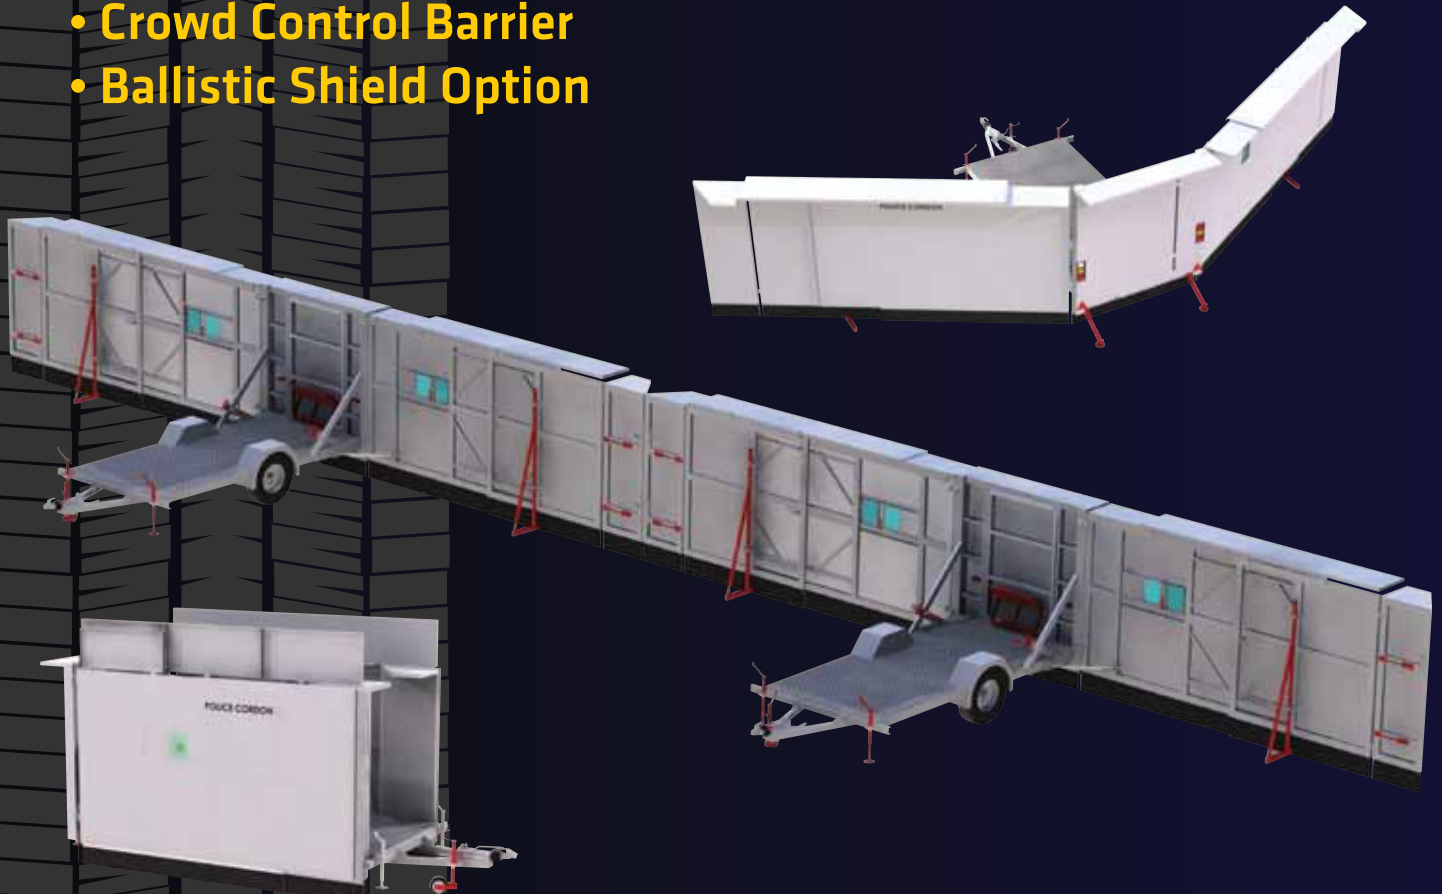

Barrier Features

- Fully deployable in 4 minutes
- Front and rear stabilising legs
- Adjustable deployed width
- Fold out anti scaling overhangs
- Solid barrier skin
- Access door
- Viewing windows
- Facility to join multiple units to increase barrier width


Trailer Features

- Single axle for easy manoeuvring
- EC approved overrun brake system (No brake connections between towing vehicle and trailer)
- Land Rover / Transit towable
- Options on towing eye type
- Low maintenance rubber suspension
- Fully road legal trailer lighting
- Run flat tyres

Oldbury mobility solutions for industry +44(0)1902 397216
www.oldburyuk.co.uk

EQUIPMENT SPECIFICATION


Transportation Dimensions

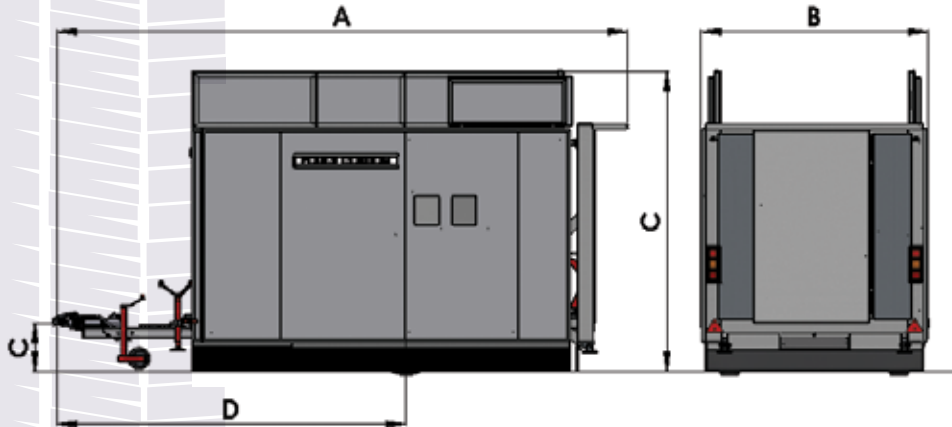


Trailer Type	Single Axle Type O2 * Drawbar Trailer
Trailer Tare Weight	2,350 Kg
Gross Trailer Load	2,500 Kg
Maximum Imposed Weight	150 Kg
Overall Length	- Dimension A 5,770mm
Overall Width	- Dimension B 2,300mm
Overall Height	- Dimension C 3,030mm
Coupling Height	- Dimension D 500mm
Wheel Base	- Dimension E 3,530mm

*EU trailer type

Deployed Dimensions

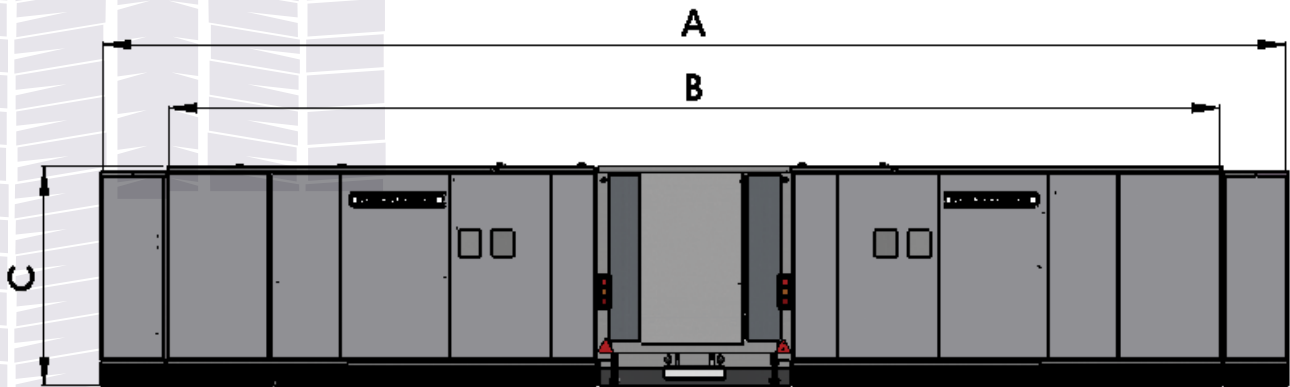

Maximum Width with Side Doors Deployed	- Dimension A max	13,500mm
Maximum Width with Side Doors Stowed	- Dimension B max	12,000mm
Minimum Width with Side Doors Deployed	- Dimension A min	10,900mm
Minimum Width with Side Doors Stowed	- Dimension B min	9,500mm
Overall Height with Anti Scaling Overhangs Deployed	- Dimension C	2500mm
Overall Length with Barrier Deployed	- Dimension D	5,800mm



All width dimensions are based on deployment of both fold-out sides.
Minimum width with one side only deployed = 5,900mm

Oldbury mobility solutions for industry +44(0)1902 397216
www.oldburyuk.co.uk